



# RAK *fix* L.L.C

[www.rakfix.com](http://www.rakfix.com)



## Our Products

- ▶ BONDING KEY COATS
- ▶ CEMENT RENDERS/PLASTERS
- ▶ COLOURED RENDERS
- ▶ GYPSUM PLASTERS
- ▶ MASONRY MORTARS
- ▶ TILE ADHESIVES
- ▶ TILE GROUTS
- ▶ FLOOR SCREEDS
- ▶ THERMAL INSULATION RENDERS
- ▶ CONCRETE REPAIR MORTARS
- ▶ NONSHRINK GROUTS
- ▶ 3D CONCRETE



### Company Profile



**RAK *fix*** is a leading manufacturer of dry mix mortar based on cement, lime and gypsum. **RAK *fix*** is located in Ras Al Khaimah, which is well known for its high quality natural mineral resources.

**RAK *fix*** dry mix mortars are transported in dry form to the construction site, where only water is added to the dry mortar in specified quantity just before the application.

**RAK *fix*** has a wide range of machines to suit all applications and volume of work. For a large scale of plaster job, plastering machines with the silo system is the perfect solution. Plastering machines mix and spray the wet mortar on to the wall or ceiling where it is leveled and finished by skilled masons. **RAK *fix*** provides PFT G4 plastering machines to get a consistent quality of wet plaster mortar. An uninterrupted supply of dry mix plaster from the silo, which stands at a convenient place, ensures a continuous work and high output. For high-rise towers relay stations are provided to convey the dry mortar to any desired height. For masonry mortar and screed **RAK *fix*** provides horizontal screw mixer for continuous supply of wet mortar.



**RAK *fix*** offers jobsite training for the masons for machine operation and application of dry mix products.

**RAK *fix*** dry mix mortar are designed in accordance with the relevant standard specifications of BSEN & ASTM. The product range includes different kind of bonding key coats, plasters/renders, coloured decorative renders, gypsum plasters, masonry mortars, screeds, concrete repair mortars, grouts and 3D concretes.

### Advantages of the **RAK *fix*** dry mix mortars

- ▶ Saving in time and labour
- ▶ Consistent quality
- ▶ Reduction in overhead cost
- ▶ Wider choice of material and application process
- ▶ Speed of application with machine
- ▶ Pollution and hazards free mechanized process of application
- ▶ Accurate account of material used
- ▶ Early removal of scaffolding

**RAK *fix*** offers the following 2 type of delivery systems

- ▶ Paper bags in 25, 40 & 50kg are palletized and shrink wrapped
- ▶ Silo in 20m<sup>3</sup>, with option of refilling at site by tankers

An experienced Sales and Technical Support Service Team of **RAK *fix*** is available to offer you the right kind of material and services to the highest satisfaction.

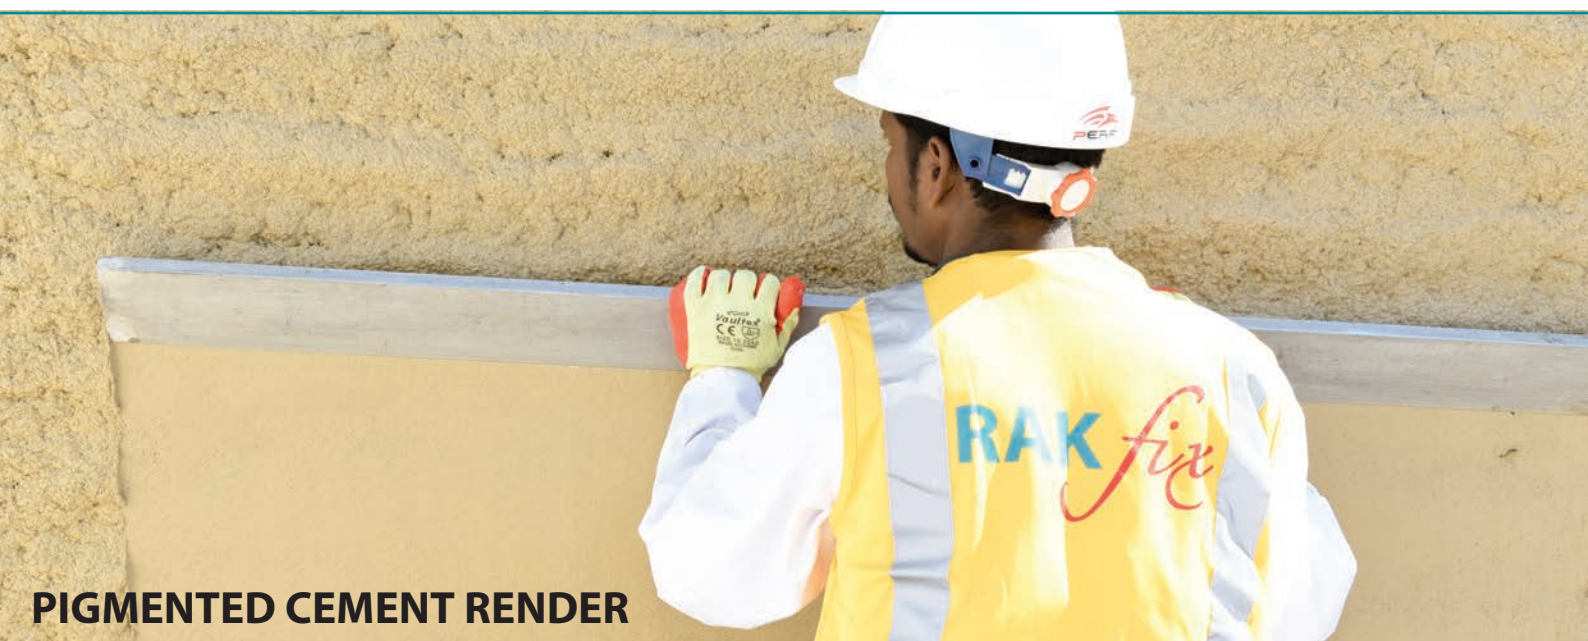




## **BENEFITS OF SILO SYSTEM**


- **Saving in time and man power**
- **Saving in number of manual operations**
- **No handling and storage of bags at the construction site**
- **Availability of product in required quantity**
- **Full protection of material from theft, weather condition & spillage**
- **Needs less space**
- **Highly efficient mechanised process of plastering**






Bondcrete

RAK *fix* 010

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags	<ul style="list-style-type: none"> <li>Bonding key coat for general concrete surface</li> <li>Provides rough textured surface for plastering</li> <li>Avoids hacking/chipping on concrete surface</li> </ul>	430m <sup>2</sup> @ 2mm thickness	Dry mix mortar consisting of OPC, quality enhancing additives and processed mineral aggregates. Applied on concrete surface to achieve mechanical key for plastering.


Bondcrete

RAK *fix* 012

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags	<ul style="list-style-type: none"> <li>Bonding key coat for densified concrete surface</li> <li>Provides rough textured surface for plastering</li> <li>Avoids hacking/chipping on concrete surface</li> </ul>	430m <sup>2</sup> @ 2mm thickness	Dry mix mortar consisting of OPC, quality enhancing additives and processed mineral aggregates. Applied on concrete surface to achieve mechanical key for plastering.


Bondcrete

RAK *fix* 014

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags	<ul style="list-style-type: none"> <li>Bonding key coat for ultra smooth and impermeable concrete surface</li> <li>Provides rough textured surface for plastering</li> <li>Avoids hacking/chipping on concrete surface</li> </ul>	430m <sup>2</sup> @ 2mm thickness	Dry mix mortar consisting of OPC, quality enhancing additives and processed mineral aggregates. Applied on concrete surface to achieve mechanical key for plastering.


Bondcrete

RAK *fix* 016

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags	<ul style="list-style-type: none"> <li>Bonding key coat for non-absorbing surfaces of EPS/XPS etc.</li> <li>Provides rough textured surface for plastering</li> <li>Compatible with EPS/XPS surfaces</li> </ul>	430m <sup>2</sup> @ 2mm thickness	Dry mix mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Applied on non-absorbing surfaces to achieve mechanical key for plastering.


Cement Lime Plaster

RAK *fix* 020

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags Silo	<ul style="list-style-type: none"> <li>Suitable for plastering/rendering of normal concrete blocks and concrete background</li> <li>Machine applied spray plaster</li> <li>Thickness 10-20mm</li> </ul>	42m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with machine on concrete blocks and concrete background at interiors and exteriors.


Cement Plaster

RAK *fix* 021

	Benefits	Approx. Coverage [per ton]	Product Description
50kg  Bags Silo	<ul style="list-style-type: none"> <li>Suitable for plastering/rendering of normal concrete blocks and concrete background</li> <li>Machine applied spray plaster</li> <li>Lime free</li> <li>Thickness 10-20mm</li> </ul>	42m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, quality enhancing additives and processed mineral aggregates. Applied with machine on concrete blocks and concrete background at interiors and exteriors.


Cement Lime Plaster for AAC/Concrete Blocks

RAK *fix* 022

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• Universal plaster suitable for all types of masonry blocks</li> <li>• Strength compatible with AAC blocks</li> <li>• Machine applied spray plaster</li> <li>• Thickness 10-20mm</li> </ul>	42m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with machine on all types of masonry blocks and concrete background at interiors and exteriors.


Cement Plaster for AAC/Concrete Blocks

RAK *fix* 023

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• Universal plaster suitable for all types of masonry blocks</li> <li>• Strength compatible with AAC blocks</li> <li>• Lime free</li> <li>• Machine applied spray plaster</li> <li>• Thickness 10-20mm</li> </ul>	42m <sup>2</sup> @ 15mm thickness	Dry mix mortar consisting of OPC, quality enhancing additives and processed mineral aggregates. Applied on concrete surface to achieve mechanical key for plastering.


Light Weight Cement Lime Plaster

RAK *fix* 024

 <p>30kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• Light weight plaster</li> <li>• More yield and coverage</li> <li>• Machine applied spray plaster</li> <li>• Thickness 10-20mm</li> <li>• Suitable for all masonry and concrete surfaces</li> </ul>	50m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, hydrated lime, quality enhancing additives, EPS beads and processed mineral aggregates. Applied on interiors and exteriors.


Cement Plaster

RAK *fix* 025

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• High strength &gt;10 N/mm<sup>2</sup></li> <li>• Thickness 10-20mm</li> <li>• Machine applied spray plaster</li> </ul>	37m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, quality enhancing additives and processed mineral aggregates. Applied on interiors and exteriors.


High Strength Plaster

RAK *fix* 026

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• High strength &gt;15 N/mm<sup>2</sup></li> <li>• 15-50mm thickness</li> <li>• Machine applied spray plaster</li> <li>• Suitable for artificial rock work and landscaping</li> </ul>	40m <sup>2</sup> @ 15mm thickness	Dry mix plaster consists of OPC, quality enhancing additives, and processed mineral aggregates. Applied with machine or by hand.


Smoothing Plaster

RAK *fix* 028

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>• Finishing coat plaster</li> <li>• 4-6mm thickness</li> <li>• Suitable for ceiling</li> <li>• Machine applied spray plaster</li> </ul>	162m <sup>2</sup> @ 4mm thickness	Dry mix plaster consists of OPC, quality enhancing additives and processed mineral aggregates. Applied with machine or by hand.


Smoothing Plaster

RAK *fix* 028D

 <p>40kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Finishing coat plaster</li> <li>Direct application on concrete surfaces like ceiling areas</li> <li>Machine applied spray plaster</li> <li>3-8mm thickness</li> </ul>	152m <sup>2</sup> @ 4mm thickness	Dry mix plaster consists of OPC, quality enhancing additives and processed mineral aggregates. Applied with machine or by hand.


Thermal Insulation Render

RAK *fix* 029

 <p>15kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Thermal insulation render for all types of masonry blocks and concrete surfaces</li> <li>Thermal conductivity value 0.1 W/m. K</li> <li>Machine applied spray plaster</li> <li>Thickness 40-60mm</li> </ul>	48m <sup>2</sup> @ 40mm thickness	Dry mix plaster consists of OPC, quality enhancing additives, EPS beads and processed mineral aggregates. Applied with machine on all masonry blocks and concrete background at exteriors.


Pigmented cement Render

RAK *fix* 030

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Variety of light shades</li> <li>Heritage finish</li> <li>Suitable for masonry and concrete surfaces</li> <li>Machine applied spray plaster</li> <li>Thickness 15-20 mm</li> </ul>	42m <sup>2</sup> @ 15mm thickness	Dry mix pigmented render consisting of white Portland cement, inorganic pigments, quality enhancing additives and processed marble aggregates. Applied with machine on masonry and concrete background.


Textured Render

RAK *fix* 032

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Variety of light shades</li> <li>Suitable for masonry and concrete surfaces</li> <li>Machine applied spray plaster</li> <li>Thickness 15-20 mm</li> </ul>	35m <sup>2</sup> @ 15mm thickness	Dry mix pigmented render consisting of white Portland cement, inorganic pigments, quality enhancing additives and processed marble aggregates. Applied with machine on masonry and concrete background.


Rock Plaster

RAK *fix* 034

 <p>50kg Bags Silo</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>High strength &gt; 15 N/mm<sup>2</sup></li> <li>Suitable for artificial rock work and landscaping</li> <li>Variety of light shades</li> <li>Machine applied spray plaster</li> <li>15-50mm thickness</li> </ul>	38m <sup>2</sup> @ 15mm thickness	Dry mix pigmented plaster consisting of white Portland cement, quality enhancing additives and processed mineral aggregates. Applied with machine or by hand for landscaping works.

Tyrolean Texture Coat

RAK *fix* 037

 <p>50kg Bags</p>	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Decorative pigmented spray applied texture coat finish</li> <li>3-4mm thickness</li> <li>Applied by spray gun/Tyrolean box or manually</li> </ul>	180m <sup>2</sup> @ 3.5mm thickness	Dry mix pigmented texture coat consists of WPC, inorganic pigments, quality enhancing additives and processed mineral aggregates. Applied with spray gun or manually.



**GYPSUM PLASTER**




**MASONRY MORTAR**



**MASONRY MORTAR FOR AAC BLOCK**


**Mineral Texture Finish**

**RAK fix 038**

50kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Decorative pigmented trowel applied texture coat finish</li> <li>3-4mm thickness</li> <li>Applied manually</li> </ul>	160m <sup>2</sup> @ 3.5mm thickness	Dry mix pigmented texture coat consists of WPC, inorganic pigments, quality enhancing additives and processed mineral aggregates. Applied by manually.


**Gypsum Plaster - Standard**

**RAK fix 040**

25kg  Bags Silo	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Plaster for internal walls and ceilings</li> <li>10-20mm thickness</li> <li>No water curing</li> <li>Machine applied spray plaster</li> <li>Provides cooling effect</li> </ul>	58m <sup>2</sup> @ 12mm thickness	Dry mix plaster consisting of hemi-hydrated gypsum, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with machine on interior walls and ceilings.


**Gypsum Plaster - Thin plaster**

**RAK fix 042**

25kg  Bags Silo	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Thin coat finishing plaster, 4-6mm</li> <li>Applied on concrete and plaster surface</li> <li>No water curing</li> <li>Machine applied spray plaster</li> <li>Machine/hand applied</li> </ul>	208m <sup>2</sup> @ 4mm thickness	Dry mix plaster consisting of hemi-hydrated gypsum, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with machine or by hand on plastered walls and ceilings.


**Masonry Mortar for Concrete Blocks**

**RAK fix 050**

50kg  Bags Silo	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Masonry mortar for laying/fixing concrete blocks</li> <li>Excellent durability</li> <li>Compressive strength &gt; 10 N/mm<sup>2</sup></li> <li>Mixing by screw machine/manually</li> </ul>	37 m <sup>2</sup> @ 10mm thickness (40*20*20cm block)	Dry mix masonry mortar consisting of OPC, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with trowel to fix normal concrete blocks.


**Masonry Mortar for AAC Blocks**

**RAK fix 052**

40kg  Bags Silo	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Adhesive mortar for fixing AAC light weighting blocks</li> <li>Thin bed mortar 3-5mm thick</li> <li>Excellent adhesion on smooth and porous AAC blocks</li> <li>Mixing by screw machine/manually</li> </ul>	108 m <sup>2</sup> @ 5mm thickness (60*25*20cm block)	Dry mix thin bed mortar consisting of OPC, hydrated lime, quality enhancing additives and processed mineral aggregates. Applied with trowel to fix AAC blocks.

**Tile Adhesive Tilefix**

**RAK fix 055E**

25kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Economical grade for general use.</li> <li>For fixing ceramic &amp; porcelain tiles on walls &amp; floors.</li> <li>Mixing by screw machine/manually</li> </ul>	Yield 670 L	Dry mix mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.



**TILE ADHESIVE**



**FLOOR SCREED**



**TILE GROUT**




**REPAIR MORTAR**



**NONSHRINK GROUT**


**Tile Adhesive Hifix**

**RAK fix 056**

25kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>High bonding grade for critical areas</li> <li>For fixing ceramic &amp; porcelain tiles on walls &amp; floors</li> <li>Mixing by screw machine/manually</li> </ul>	Yield 670 L	Dry mix mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.


**Tile Adhesive Flexifix**

**RAK fix 058**

25kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>High flexible grade for special applications</li> <li>For fixing ceramic &amp; porcelain tiles on walls &amp; floors</li> <li>Mixing by screw machine/manually</li> </ul>	Yield 670 L	Dry mix mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.


**Grout for Tiles**

**RAK fix 057**

25kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Standard grade</li> <li>For ceramic &amp; porcelain tiles joints on walls &amp; floors</li> <li>Mixing by screw machine/manually</li> </ul>	Yield 690 L	Dry mix mortar consists of WPC, inorganic pigments, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.


**Grout for Tiles**

**RAK fix 057WP**

25kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Waterproof grade</li> <li>For ceramic &amp; porcelain tiles joints on walls &amp; floors</li> <li>Mixing by screw machine/manually</li> </ul>	Yield 690 L	Dry mix mortar consists of WPC, inorganic pigments, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.



**Thermofix**

**RAK fix 059**

40kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>Adhesive and reinforcing layer for EPS/XPS insulation sheets</li> <li>Provides Ideal surface for the texture finish/paint of EIFS system</li> <li>Mixing by screw machine/manually</li> </ul>	200 m <sup>2</sup> @3mm thickness	Dry mix mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Mixing by screw machine/manually.


**Floor Screed**

**RAK fix 060**

50kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
 Silo	<ul style="list-style-type: none"> <li>Suitable for 20-100mm thickness</li> <li>Self-compacting screed</li> <li>Bonded/un-bonded/floating screed</li> <li>15-40 N/mm<sup>2</sup> strength</li> <li>Mixing by screw machine/manually</li> </ul>	26 m <sup>2</sup> @ 20mm thickness	Dry mix screed for rough and uneven concrete floors. Consist of OPC, quality enhancing additives and mineral aggregates. Mixing by screw machine/manually.


**Repair Mortar**

**RAK fix 070**

40kg  Bags	Benefits	Approx. Coverage [per ton]	Product Description
	<ul style="list-style-type: none"> <li>For fine concrete and wall repairs</li> <li>Strength &gt;20 N/mm<sup>2</sup></li> <li>Shrinkage compensated mortar</li> <li>Mixing manually</li> </ul>	Yield 620 L	Dry mix mortar for fine concrete repairs. Consist of OPC, special quality enhancing additives and mineral aggregates.


**Repair Mortar**

**RAK fix 072**

50kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
	<ul style="list-style-type: none"> <li>• For thick concrete and masonry repairs</li> <li>• Shrinkage compensated mortar</li> <li>• Strength &gt;40N/mm<sup>2</sup></li> <li>• Mixing manually</li> </ul>	Yield 530 L	Dry mix mortar for thick concrete repairs. Consist of OPC, special quality enhancing additives and mineral aggregates.


**Crack Filler**

**RAK fix 075**

40kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
	<ul style="list-style-type: none"> <li>• Fine repair mortar for plaster shrinkage cracks</li> <li>• Easy to apply by hand</li> <li>• Compatible with cement plaster</li> <li>• Mixing manually</li> </ul>	Yield 650 L	Dry mix fine repair mortar consists of OPC, quality enhancing additives and processed mineral aggregates. Applied by hand.


**Non-Shrink Grout**

**RAK fix 080**

50kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
	<ul style="list-style-type: none"> <li>• Strength &gt;40N/mm<sup>2</sup></li> <li>• Shrinkage compensated mortar</li> <li>• Suitable for pouring</li> <li>• Mixing by screw machine/manually</li> </ul>	Yield 510 L	Dry mix mortar for fixing machine foundation and other similar type of application. Consists of OPC, quality enhancing additives and mineral aggregates.



**Non-Shrink Grout**

**RAK fix 082**

50kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
	<ul style="list-style-type: none"> <li>• Strength &gt;70N/mm<sup>2</sup></li> <li>• Shrinkage compensated mortar</li> <li>• Suitable for pouring</li> <li>• Mixing by screw machine/manually</li> </ul>	Yield 510 L	Dry mix mortar for fixing machine foundation and other similar type of application. Consists of OPC, quality enhancing additives and mineral aggregates.



**3D Concrete mix**

**RAK fix 090 C**

50kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
 Silo	<ul style="list-style-type: none"> <li>• Concrete for 3D printing</li> <li>• Strength &gt; 25 N/mm<sup>2</sup></li> <li>• Shrinkage compensated mortar</li> <li>• Regionally developed product</li> <li>• Compatible with different types of printers</li> <li>• Suitable for internal &amp; external printing</li> </ul>	Yield 600 L	Dry mix mortar for 3D printing application. Consists of OPC, special cement, quality enhancing additives and mineral aggregates.

**3D Concrete mix**

**RAK fix 090 G**

40kg  Bags	<b>Benefits</b>	<b>Approx. Coverage [per ton]</b>	<b>Product Description</b>
 Silo	<ul style="list-style-type: none"> <li>• Concrete for 3D printing</li> <li>• Strength &gt; 7 N/mm<sup>2</sup></li> <li>• Shrinkage compensated mortar</li> <li>• Regionally developed product</li> <li>• Compatible with different types of printers</li> <li>• Suitable for internal &amp; external printing</li> </ul>	Yield 720 L	Dry mix mortar for 3D printing application. Consists of hemi-hydrated Gypsum, special cement, quality enhancing additives and mineral aggregates.





**RAK** *fix* L.L.C

**P.O. Box: 6575, Ras Al Khaimah, UAE**

**Tel.: (+971)07 24 47 260, Fax: (+971) 07 24 47 261**

**E-mail: [sales@rakfix.com](mailto:sales@rakfix.com), Website: [www.rakfix.com](http://www.rakfix.com)**